


Multiroom


This function allows independent multiroom viewing different programs offered by digital pay-TV in two rooms simultaneously within a single subscription. This function is used to operate a local area network (LAN). Now, each house member can enjoy all their favourite channels without any conflicts. On each TV receiver, different channels can be watched at the same time.

Note: The multiroom-service can only be used within a single household. This solution supports only one slave.

Cables used for connections



Proper connection draft

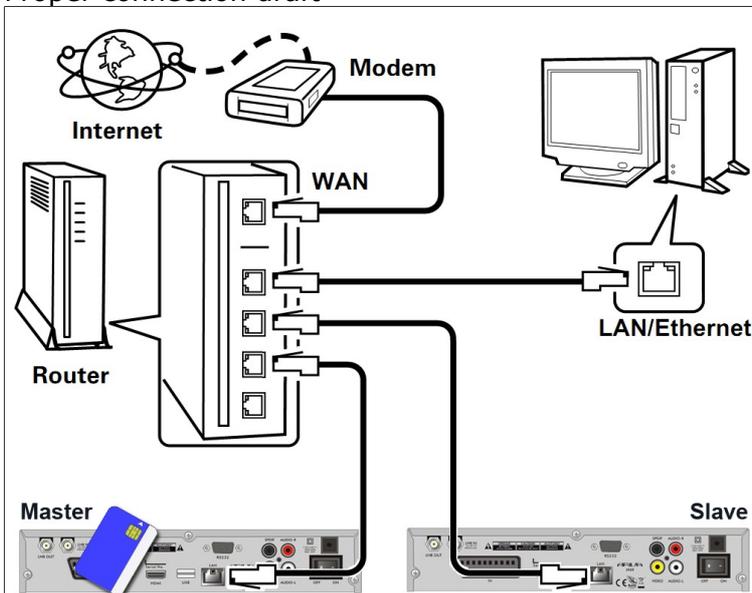

Step 1. Before you start

Ensure that DHCP is running and the MAC address is different on each receiver.

Turn on both receivers and wait until each will get the right IP address.

Step 2. Configuration of the main receiver (master)

Switch the main receiver with inserted pay-TV card to mode: Master. To do this, go to *menu>tools>conditional access>multiroom* select **Master** and press **EXIT** to save. Wait a configuration may take a few minutes.

Go to *menu>system settings>other* and turn on the clock in standby mode. This change is necessary to make multiroom service available also when main receiver is switched to standby mode.

Step 3. Configuration of the slave receiver

Switch slave receiver mode to: Slave. To do this, go to *menu>tools>conditional access>multiroom* select **Slave** and press **EXIT** to save. Wait a configuration may take a few minutes.

Exit the menu and switch the channel to start multiroom feature.

Final remarks:

In case of problems with work, check the settings of the main receiver (Master). If the receiver has an IP address *000.000.000.244* or similar it means that the network configuration is incorrect. Probably before the configuration was not assigned a valid IP address from DHCP. To solve the problem, restore the factory settings and repeat step 2.

Due to the huge variety of hardware and configurations available for household network Ferguson can not and will not be liable for malfunction of multiroom functionality. As the added value, that is not representing the basic purpose of satellite receiver, multiroom function can not give rise to the receiver complaint.